


INSTALLATION SHEET MOBILE FLAGPOLE WITH A REVOLVING ARM

General Characteristics:

- Various height
- Minimum 160 cm
- Maximum 550 cm
- Easy to install and de-install
- Easily transported by any vehicle
- Light and economy


Mobile Flagpole

Item 0550

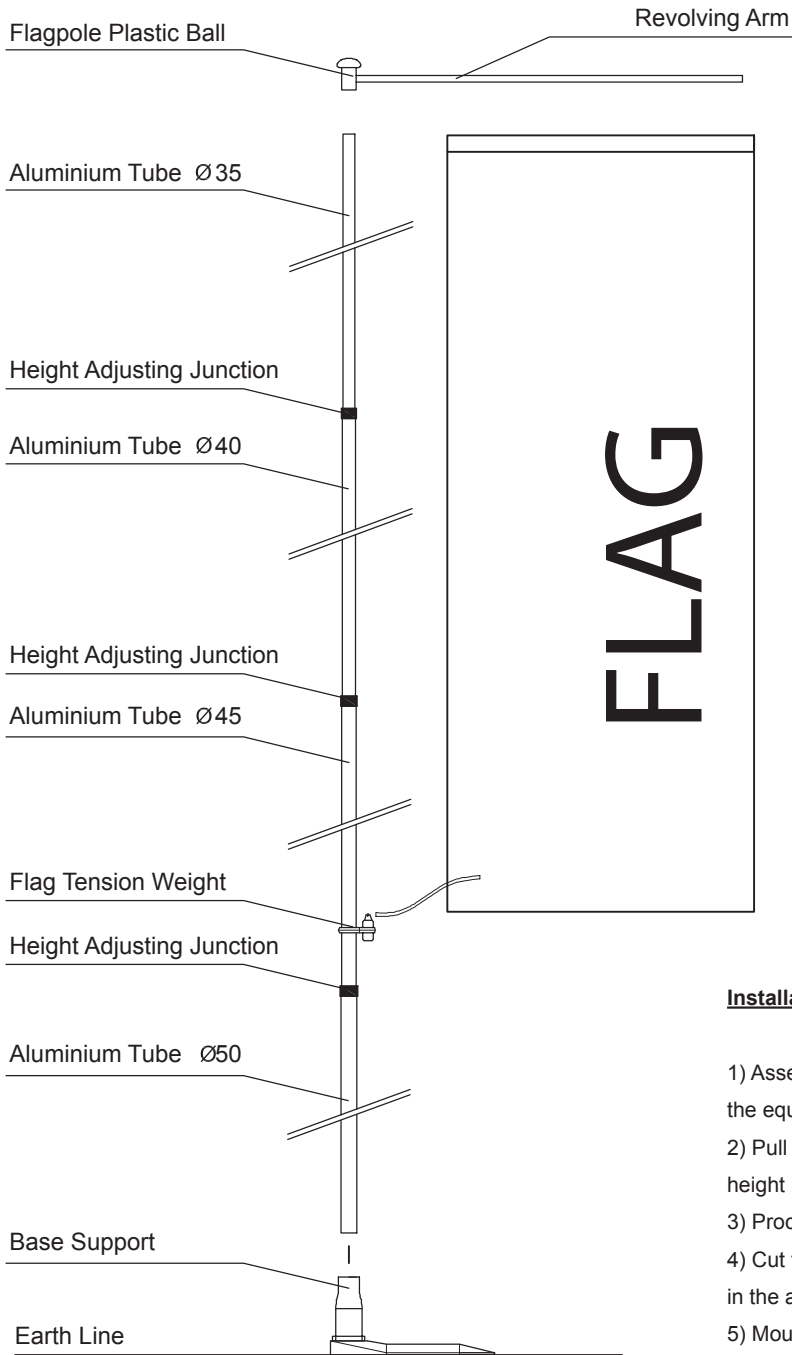

Installation Phases:

- 1) Assemble the base. Put the holder in the appropriate gap and screw the equipped bolts.
- 2) Pull out the single shafts to get the desired height (125 cm is the maximum height recommended). Then turn the tube counter-clockwise and tighten the shaft.
- 3) Proceed in the same way with the others.
- 4) Cut the revolving arm to be equal to the flag width, +8 cm and locate it in the appropriate place screwing the bolts.
- 5) Mount on the flag inserting the revolving arm into the sheath and fasten to the tension weight by a carabiner.
- 6) Ballast the base with some heavy object (a car or some flowerpot) and put the pole into the holder on the base.

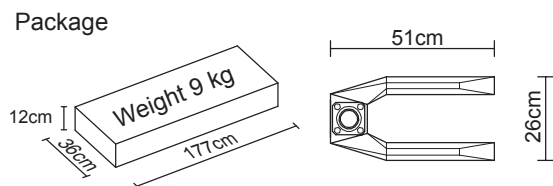

Ref. 0550	Quality	Title/ Mobile Flagpole With A Revolving Arm			Item Number/Reference 0550	
Projected by: CREVSKO'S PROJECT OFFICE		Checked by: Arch. Marco Scozzari	Approved by: Dr. Enrico Scozzari	File Name: Mobile Flagpole	Date: 16/01/2007	Scale: ----



MOBILE FLAGPOLE

Technical Sheet

Modification 0

Sheet 1/1