


INSTALLATION SHEET FIBERGLASS FLAGPOLE WITH ROPE (EXTERNAL)



Bitt with an external rope

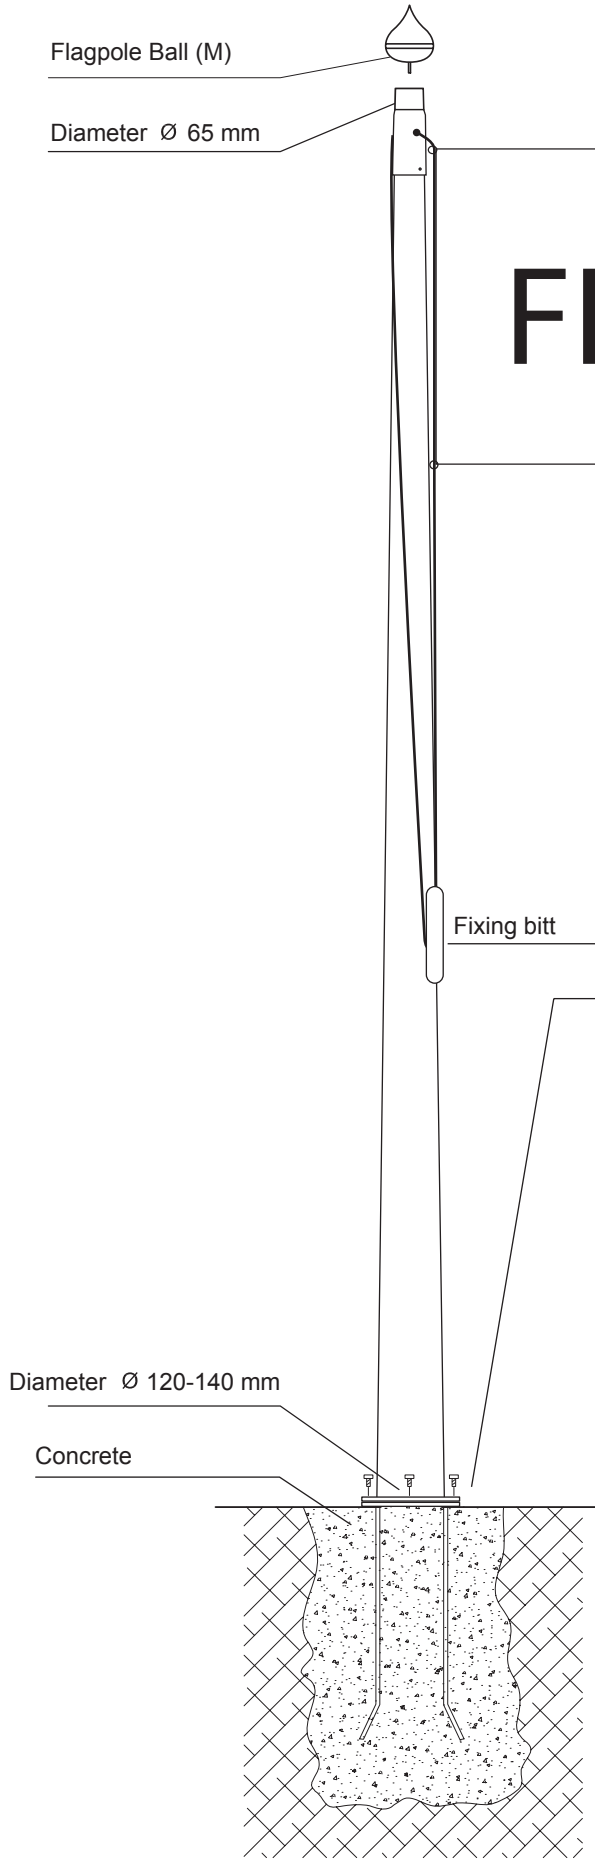

Hinge base attachment

Height, m	6,00	8,00	10,00	12,00
d - Base, mm	120	120	140	140
d - Top, mm	65	65	65	65
N° Pieces	1	1	1	1
External Rope	0420	0435	0450	0465
Internal Rope	0425	0440	0455	0470
Revolving Arm	0430	0445	0460	0475
Packing, cm		800x15x15	1000x15x15	1200x15x15
Weight, Kg	13	17	28	35
Flagpole Ball	0708	0708	0708	0708
Attachments	Hinge Base	Hinge Base	Hinge Base	Hinge Base

Installation Phases:

- 1) Make a hole into the ground.
(recommended dimensions \varnothing 60 cm. profile size 80 cm)
- 2) Locate the hinge base into the ground and cover with concrete.
- 3) Assembly the flagpole on the ground.
- 4) Mount on the flag and the counterweight.
- 5) Rise up the pole controlling for the perfect vertical alignment. Tighten bolts.

Ref.	Quality	Title/ Fiberglass Flagpole With A Rope (External)			Item Number/Reference	
Projected by: CRESKO'S PROJECT OFFICE	Checked by: Arch. Marco Scozzari	Approved by: Dr. Enrico Scozzari	File Name: Fiberglass Pole With Rope	Date: 30/06/2009	Scale: ----	
			1 PIECE FLAGPOLE WITH AN EXTERNAL ROPE			
			Technical Sheet	Modification 0	Sheet 1/1	