


INSTALLATION SHEET

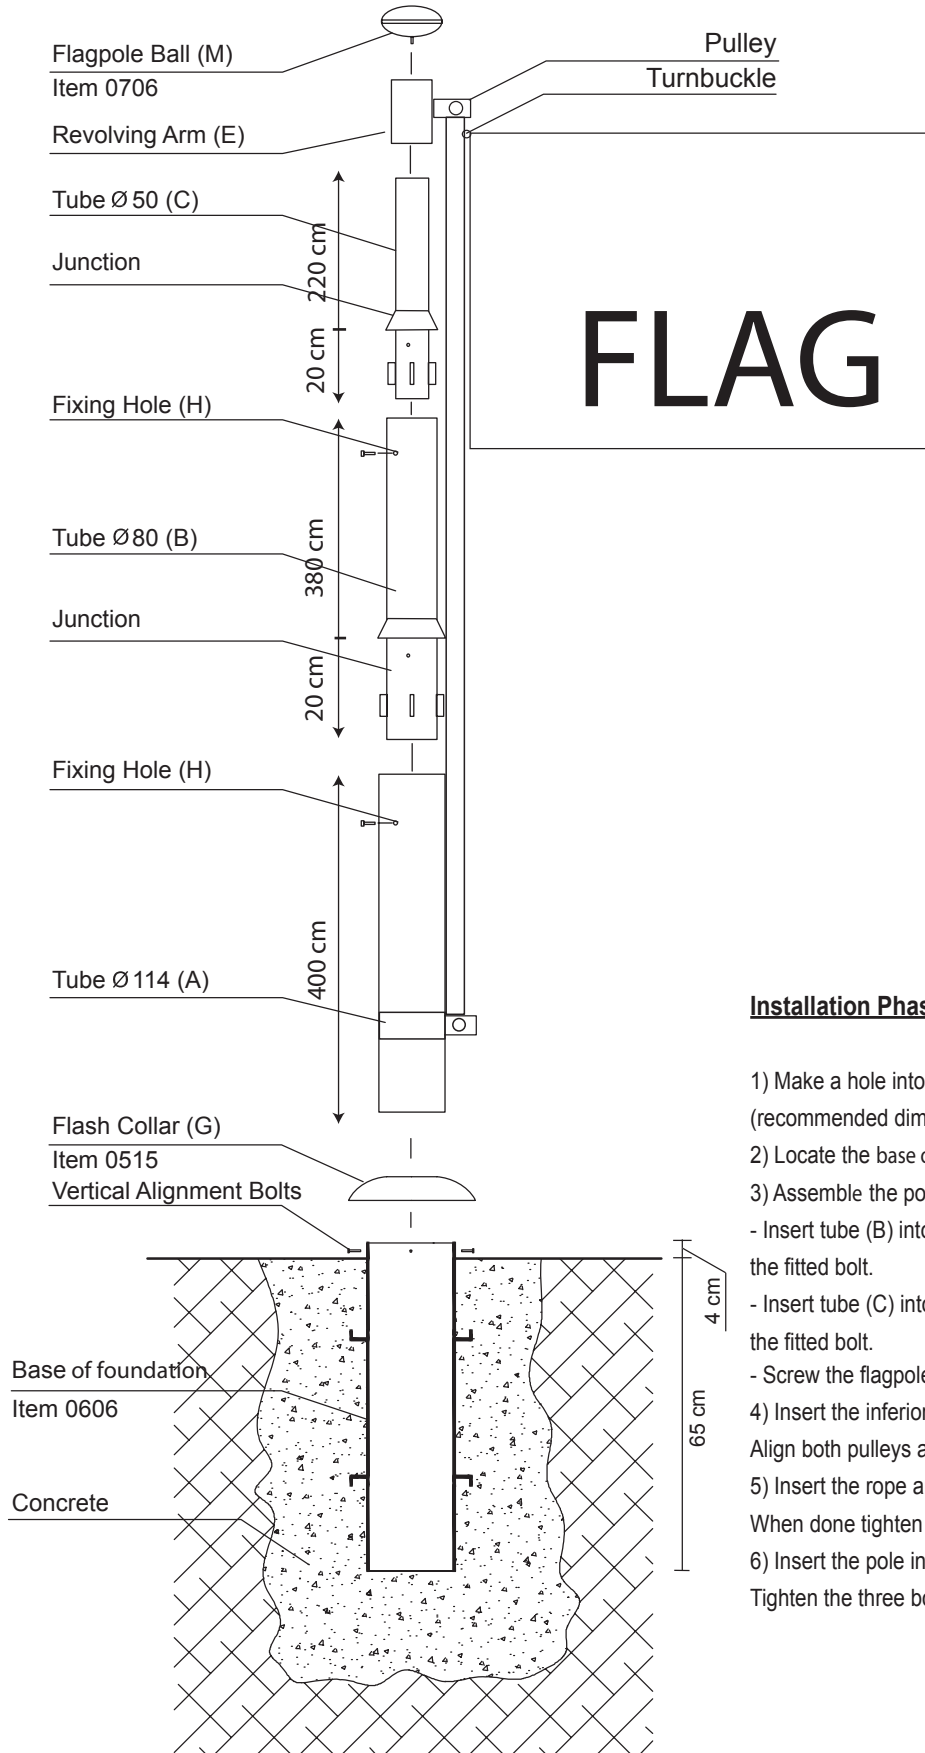

Flagpole 10 m.

Item 0508

Item 0328

FLAG

Installation Phases:

- 1) Make a hole into the ground.
(recommended dimensions Ø 60 cm. profile size 100 cm)
- 2) Locate the base of foundation into the ground and cover with concrete.
- 3) Assemble the pole on the ground following the next procedure:
 - Insert tube (B) into tube (A) in a way to match the fixing hole (H) and then tighten the fitted bolt.
 - Insert tube (C) into tube (B) in a way to match the fixing hole (H) and then tighten the fitted bolt.
 - Screw the flagpole ball (M)
- 4) Insert the inferior part of the pulley and lift up until you reach the height wanted. Align both pulleys and then tighten the blocking bead.
- 5) Insert the rope amidst the pulleys with the help of the turnbuckle which is open. When done tighten well the turnbuckle until you get a moderately tight rope.
- 6) Insert the pole into the anchor tube and position the flash collar. Tighten the three bolts and control a perfect vertical alignment to be achieved.

Ref.	Quality	Title/ Flagpole With A Pulley And An Internal Rope			Item Number/Reference	
Projected by: PROJECT OFFICE CRESKO	Checked by: Arch. Marco Scozzari	Approved by: Dr. Enrico Scozzari	File Name: Flagpole Pulley 10 m.	Date: 27/05/2009	Scale: ----	
			3 PIECES FLAGPOLE WITH PULLEY			
			Technical Sheet	Modification 0	Sheet 1/1	