


INSTALLATION SHEET

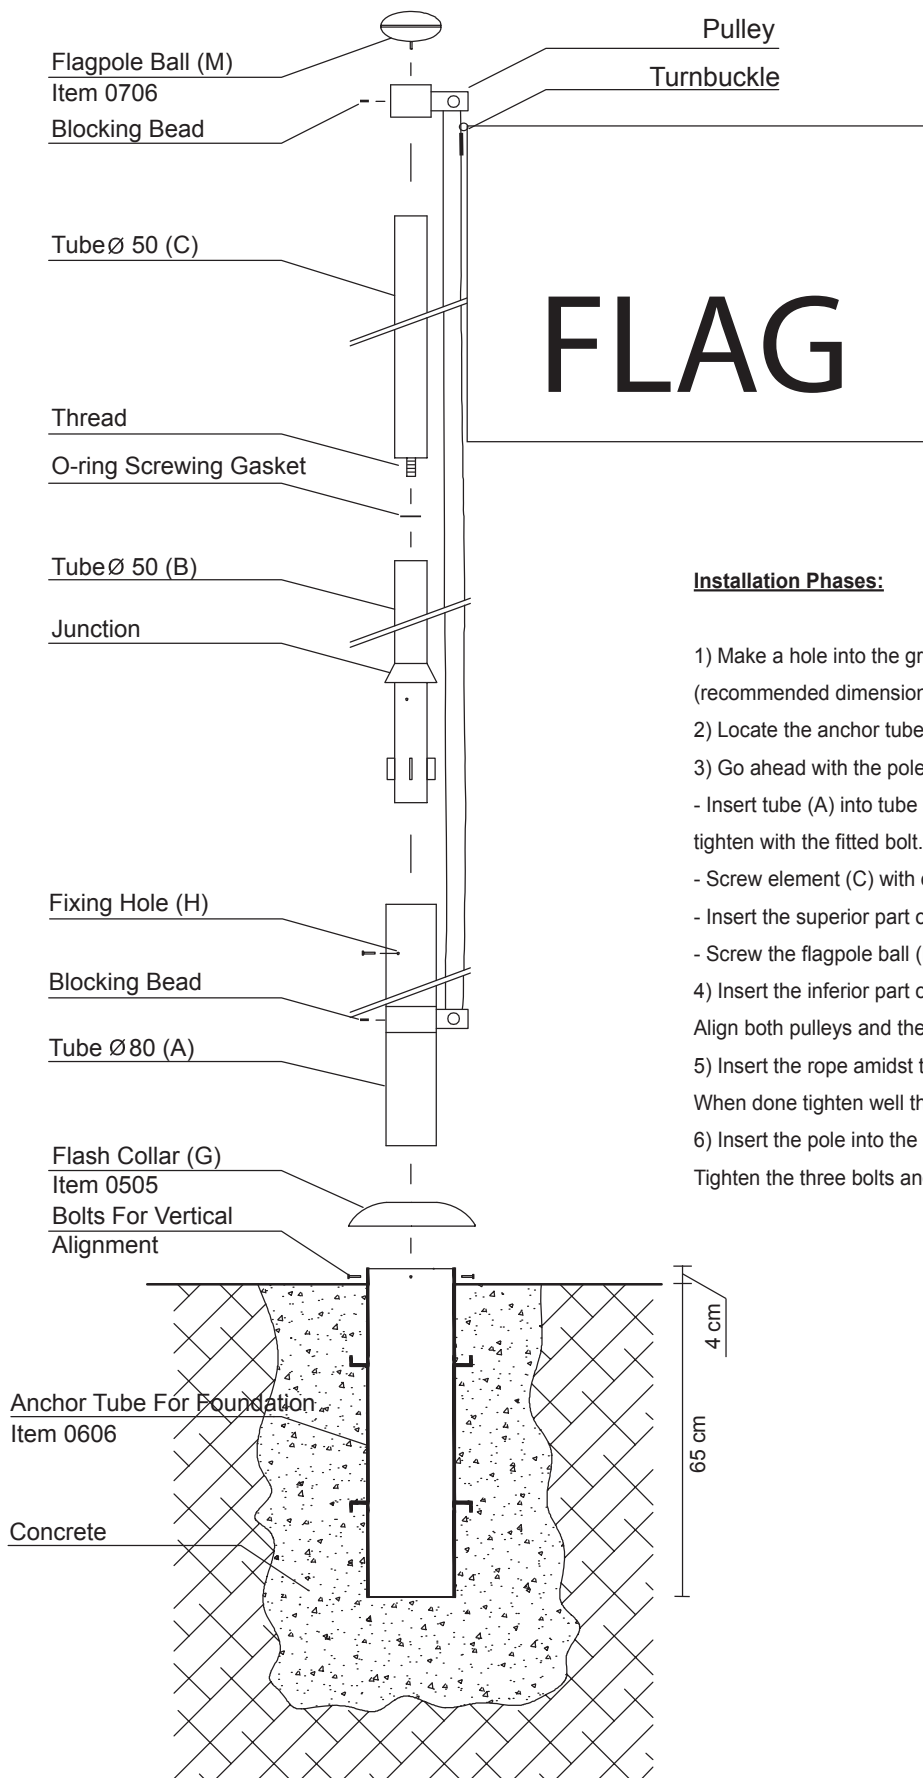

Flagpole

Item 0311
 Item 0312
 Item 0313
 Item 0510
 Item 0511
 Item 0512

Installation Phases:

- 1) Make a hole into the ground.
(recommended dimensions Ø 60 cm., profile size 80 cm)
- 2) Locate the anchor tube into the ground using concrete and clamps.
- 3) Go ahead with the pole assembly on the ground following the next procedure:
 - Insert tube (A) into tube (B) in a way to match the fixing hole (H) and then tighten with the fitted bolt.
 - Screw element (C) with element (B) using the special O-ring screwing gasket.
 - Insert the superior part of the pulley and tighten the blocking bead.
 - Screw the flagpole ball (M)
- 4) Insert the inferior part of the pulley and lift up until you reach the height wanted. Align both pulleys and then tighten the blocking bead.
- 5) Insert the rope amidst the pulleys with the help of the turnbuckle which is open. When done tighten well the turnbuckle until you get a moderately tight rope.
- 6) Insert the pole into the anchor tube and position the flash collar. Tighten the three bolts and control a perfect vertical alignment to be achieved.

Ref.	Quality	Title/ Flagpole With Pulleys			Item Number/Reference	
Projected by: CRESKO'S PROJECT OFFICE	Checked by: Arch. Marco Scozzari	Approved by: Dr. Enrico Scozzari	File Name: Flagpole With Pulley	Date: 13/12/2006	Scale: ---	
		3 PIECES FLAGPOLE WITH PULLEYS				
		Technical Sheet	Modification 1	Sheet 1/1		