


# INSTALLATION SHEET

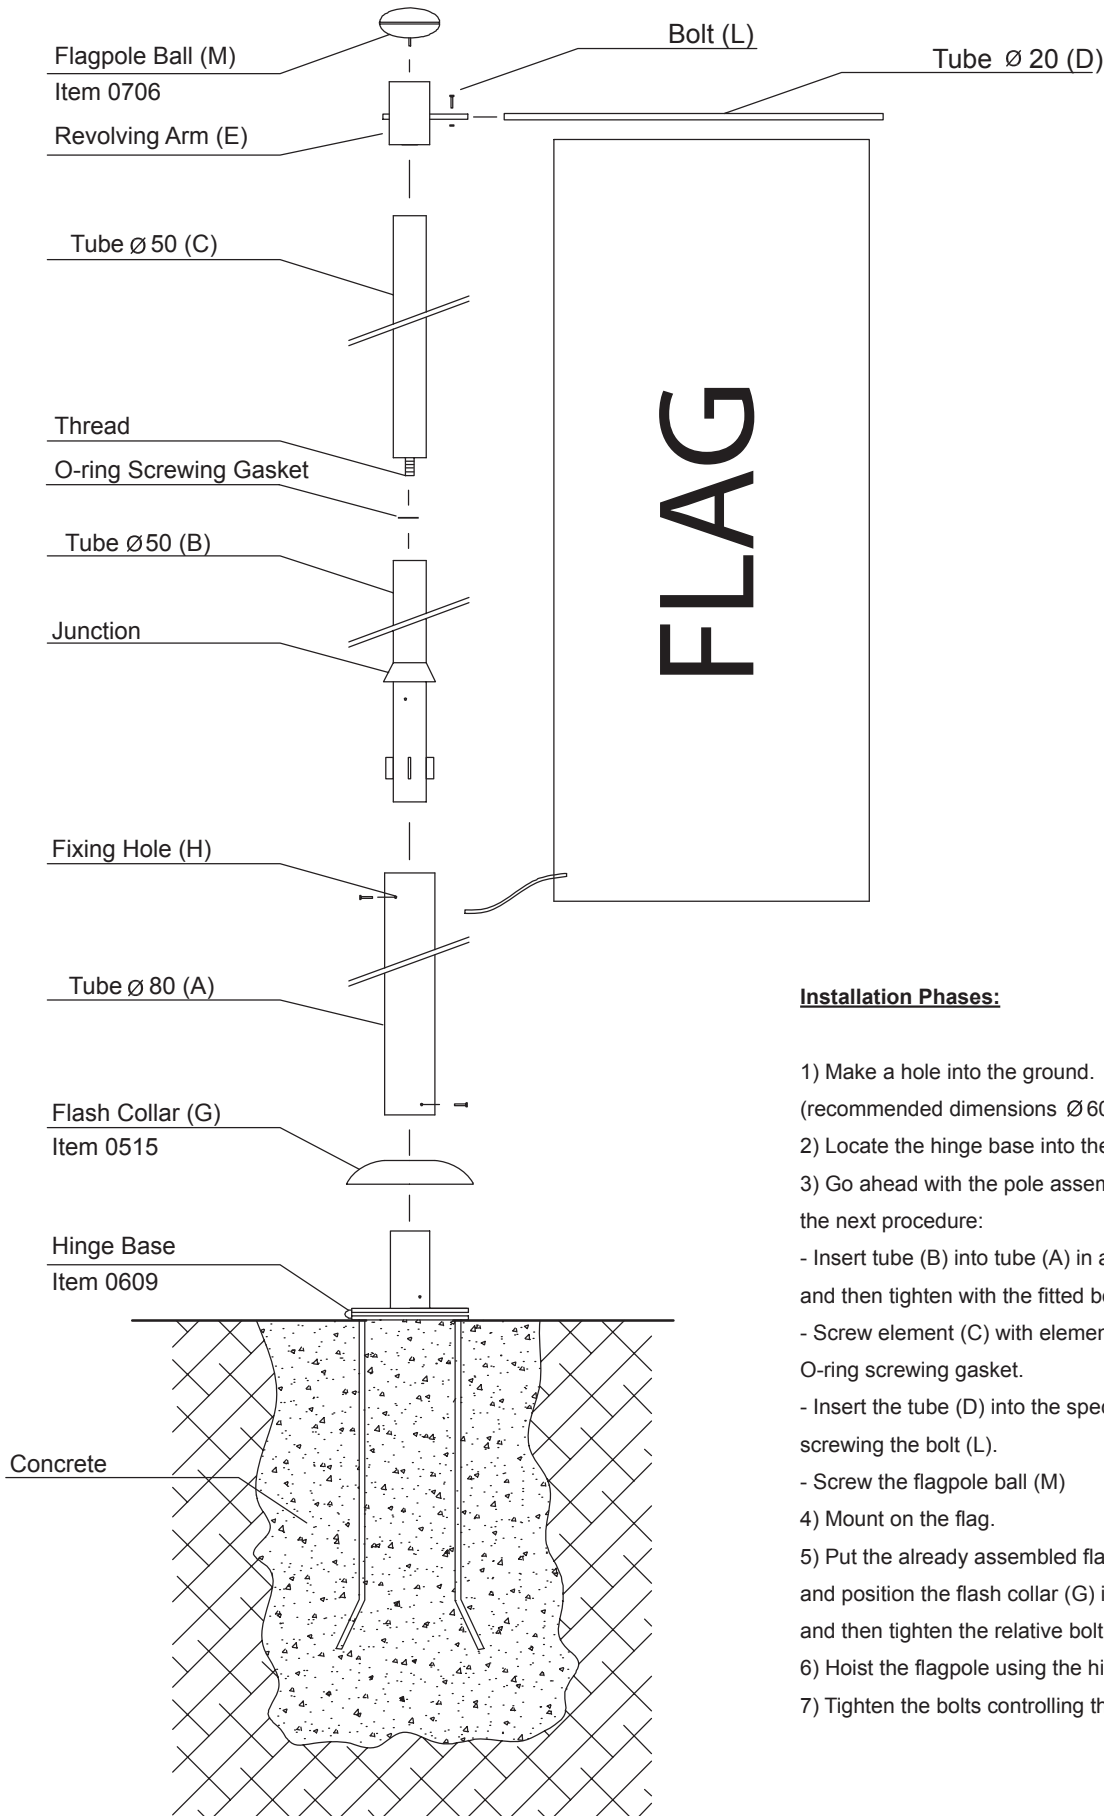

## Flagpole

Item 0334  
 Item 0335  
 Item 0336  
 Item 0337  
 Item 0338  
 Item 0339

### Installation Phases:

- 1) Make a hole into the ground.  
(recommended dimensions Ø 60 cm., profile size 80 cm)
- 2) Locate the hinge base into the ground and cover with concrete.
- 3) Go ahead with the pole assembly on the ground following the next procedure:
  - Insert tube (B) into tube (A) in a way to match the fixing hole (H) and then tighten with the fitted bolt.
  - Screw element (C) with element (B) using the special equipped O-ring screwing gasket.
  - Insert the tube (D) into the special gap located on the revolving arm (E) screwing the bolt (L).
  - Screw the flagpole ball (M)
- 4) Mount on the flag.
- 5) Put the already assembled flagpole over the hinge base and position the flash collar (G) in such a way to match the fixing holes and then tighten the relative bolt.
- 6) Hoist the flagpole using the hinges of the baseplate.
- 7) Tighten the bolts controlling the perfect vertical alignment.

Ref.	Quality	Title/ Flagpole With A Revolving Arm			Item Number/Reference	
Projected by: CRESKO'S PROJECT OFFICE	Checked by: Arch. Marco Scozzari	Approved by: Dr. Enrico Scozzari	File Name: Flagpole With A Revolving Arm	Date: 13/12/2006	Scale: ----	
			<b>3 PIECES FLAGPOLE WITH BANNER</b>			
			Technical Sheet	Modification 0	Sheet 1/1	